


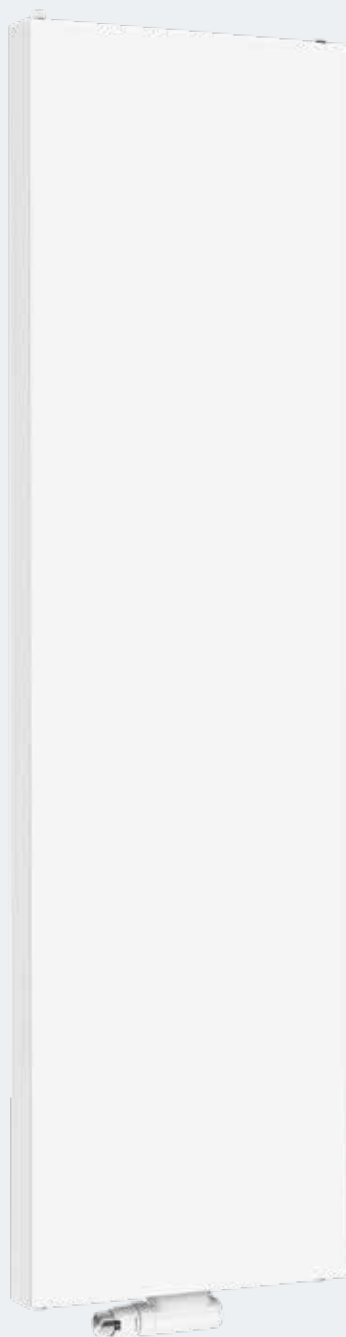


DISCOVER VERTEX PLAN

General information

VERTEX PLAN

The Vertex Plan combines a sleek and decorative appearance and is perfect for applications where wall space is at a premium. This radiator can be perfectly combined with the Planar 8 to provide a modern design and consistent look throughout your whole home.

Product:	decorative vertical radiator with a centre connection and a flat front
Finishing:	decorative flat front and side panels
Also supplied:	wall brackets, ETA safety screws and plugs, screws, plugs, air vent, blind plugs and installation instructions
Connections:	4 x ½" female connection (centre connection included)
Lugs:	no lugs
Packaging:	Every radiator is sturdily packaged in high-quality cardboard and wrapped in plastic. The radiator's characteristics are shown on the label: type – height – length.
Warranty:	10 years, as long as the installation instructions have been followed and Stelrad's warranty conditions have been met.
Paint process:	All radiators are degreased, phosphated, cataphoretically primed and powder-coated in Stelrad white 9016 as standard.
Colours:	Stelrad white 9016 + 35 different Stelrad colours and about 200 RAL-colours are possible
Max. operating pressure:	10 bar (tested to 13 bar)
Max. operating temperature:	110 °C
Conformity:	in accordance with EN442
Quality assurance:	NF
Types:	11 20 21 22
Heights:	1.600 1.800 2.000 2.200 mm
Lengths:	300 400 500 600 700 mm
Depths:	49 79 79 102 mm

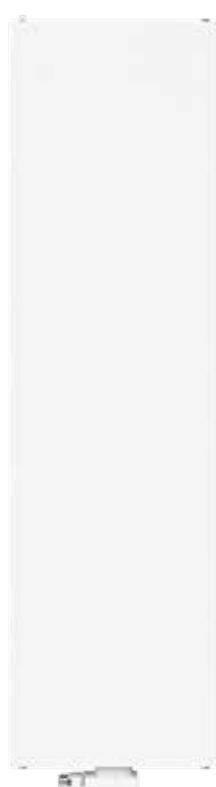


Type overview

Calculation factor
per meter
at 75/65/20°C
according to EN442

Characteristic equation:

$$\Phi = K_M \times \Delta T^n$$

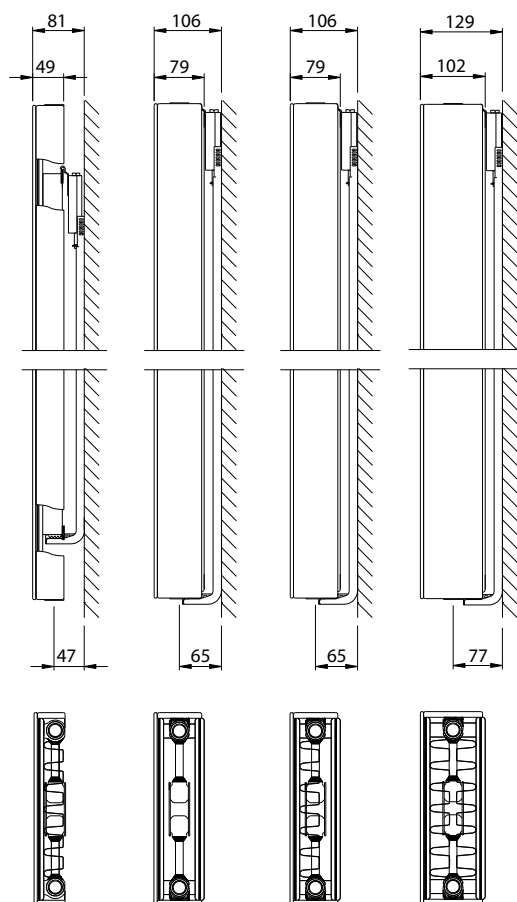

Height		Type 11	Type 20	Type 21	Type 22	Height
1600	W	1.959	2.310	2.808	3.390	1600
	kg	56,10	77,70	85,80	94,20	
	l	7,20	14,10	14,10	14,10	
	m²	9,40	7,33	12,66	17,98	
	n	1,31	1,27	1,31	1,31	
1800	W	2.133	2.532	3.060	3.690	1800
	kg	63,00	86,70	96,00	105,30	
	l	8,10	16,20	15,90	15,90	
	m²	9,86	8,25	13,58	18,90	
	n	1,30	1,27	1,30	1,31	
2000	W	2.298	2.748	3.270	3.960	2000
	kg	69,60	95,40	106,20	116,40	
	l	9,00	18,30	17,70	17,70	
	m²	11,80	9,17	15,88	22,58	
	n	1,30	1,27	1,30	1,30	
2200	W	2.454	2.958	3.510	4.230	2200
	kg	75,60	105,60	116,40	126,60	
	l	9,90	20,10	20,10	20,10	
	m²	12,26	10,09	16,79	23,50	
	n	1,29	1,27	1,30	1,29	

W=heat output per meter / kg=weight per meter / l=content per meter / m²=surface per meter / n=exponent
The manufacturer reserves the right to alter any of the specifications shown in this document without prior notice.

VERTEX PLAN

Heat outputs (EN442)

EN442 (W) 70/50/20°C

EN442 (W) 55/45/20°C



On the label:
VERTICAL PLAN

Art. 0275 18 22 04
T11-22: 0275 — H1800 — T22 — L400

Height	1600				1800				2000				2200				Height
Type	11	20	21	22	11	20	21	22	11	20	21	22	11	20	21	22	Type
300	439 302 0275161103	522 362 0275162003	629 432 0275162103	759 520 0275162203	479 329 0275181103	572 397 0275182003	686 472 0275182103	827 568 0275182203	516 355 0275201103	620 430 0275202003	734 505 0275202103	889 612 0275202203	552 380 0275221103	668 463 0275222003	788 543 0275222103	951 656 0275222203	300
400	586 403 0275161104	696 483 0275162004	839 576 0275162104	1.011 693 0275162204	638 439 0275181104	763 529 0275182004	915 629 0275182104	1.103 757 0275182204	688 474 0275201104	827 574 0275202004	979 673 0275202104	1.185 815 0275202204	736 507 0275221104	891 618 0275222004	1.051 724 0275222104	1.268 874 0275222204	400
500	732 503 0275161105	870 604 0275162005	1.049 720 0275162105	1.264 866 0275162205	797 548 0275181105	953 661 0275182005	1.144 786 0275182105	1.378 946 0275182205	860 592 0275201105	1.034 717 0275202005	1.223 841 0275202105	1.481 1.019 0275202205	920 634 0275221105	1.113 772 0275222005	1.314 905 0275222105	1.585 1.093 0275222205	500
600	878 603 0275161106	1.044 724 0275162006	1.259 864 0275162106	1.517 1.039 0275162206	957 659 0275181106	1.144 793 0275182006	1.372 943 0275182106	1.654 1.136 0275182206	1.032 711 0275201106	1.242 861 0275202006	1.468 1.010 0275202106	1.778 1.223 0275202206	1.103 761 0275221106	1.336 927 0275222006	1.577 1.086 0275222106	1.902 1.311 0275222206	600
700	1.025 704 0275161107	1.218 845 0275162007	1.468 1.008 0275162107	1.770 1.213 0275162207	1.117 768 0275181107	1.334 926 0275182007	1.601 1.100 0275182107	1.930 1.325 0275182207	1.205 830 0275201107	1.449 1.005 0275202007	1.712 1.178 0275202107	2.074 1.427 0275202207	1.287 888 0275221107	1.559 1.081 0275222007	1.839 1.267 0275222107	2.219 1.530 0275222207	700


Core assortment (Stelrad white 9016) available ex factory within 10 days.

Core assortment is subject to change, please refer to www.stelrad.eu for the latest information.

Delivery time depends on the model, please refer to your distributor.

CONNECTION POSSIBILITIES



View: front of radiator




(*) With these connection options, both the supply and return must be vented.

Top connection allowed provided there is a temperature difference between flow and return of maximum 20°C.



flow lock ●

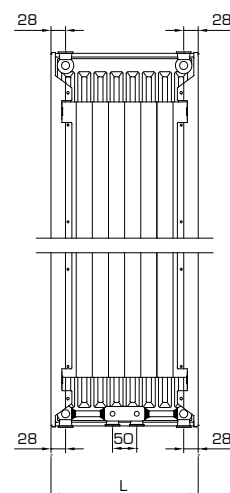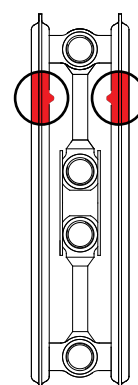

WALL BRACKETS

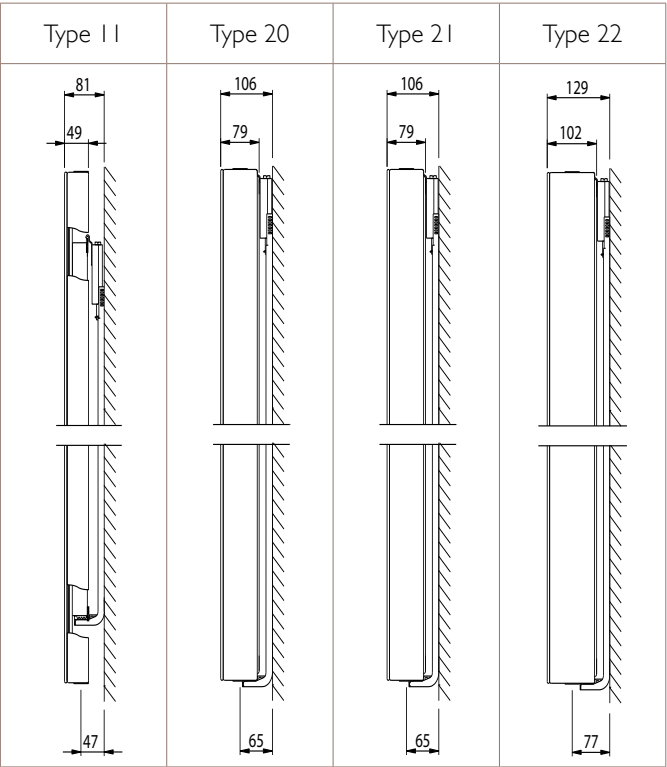

Nominal Height (mm)	Type 11			Types 20-22		
	H2	H3	H4	H2	H3	H4
1600	160	730	1300	70	740	1410
1800	160	830	1500	70	840	1610
2000	160	930	1700	70	940	1810
2200	160	1030	1900	70	1040	2010

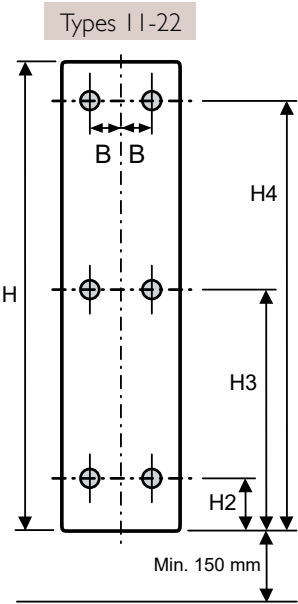


Nominal Length (mm)	Type 11	Types 20-22
	B	B
L 300	50	60
L 400	80	110
L 500	130	160
L 600	180	210
L 700	230	260

Always refer to the installation instructions and safety regulations before mounting a radiator!

An additional floor support for vertical radiators (types 20-22) is available for weak walls.

A professional inspection of the wall should always be conducted prior to mounting the radiator.

ATTENTION:
Always to be used in combination with the supplied wall brackets!

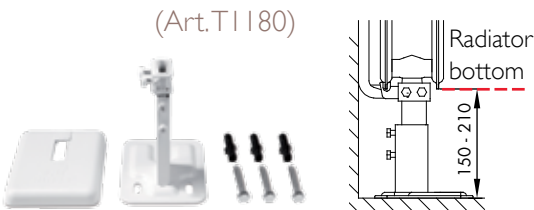

VALVED DESIGN CONNECTION FITTING

Specifications

- design cover
- design thermostatic head
- 2x ¾" - ½" reduction
- 2x conical adapter
- Inlet on thermostatic head side
- valve with adjustable Kv (8 presettings)
- maximum operating temperature: 90°C
- maximum operating pressure: 6 bar
- maximum tightening torque: 35 Nm
- body in white high-quality plastic

The valve cannot be replaced.


For two-pipe systems, not suitable for one-pipe systems.



Design connection set straight piping with left handed valve

Art. N°.T2121 - white

Art. N°.T2122 - chrome

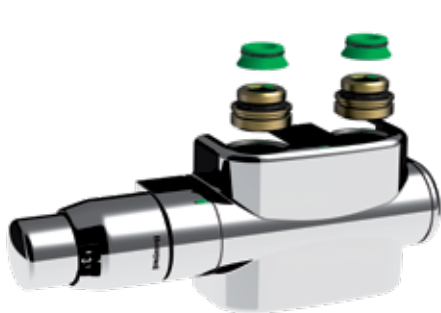

Design connection set angle piping with left handed valve

Art. N°.T2123 - white

Art. N°.T2124 - chrome





VALVED DESIGN CONNECTION FITTING

Adjustment of the valved connection fitting



Presetting	p-band xp 2,0 K	p-band xp 1,0 K
1	0,10	0,10
2	0,21	0,19
3	0,26	0,21
4	0,36	0,25
5	0,44	0,27
6	0,54	0,32
7	0,60	0,32
8	0,61	0,33

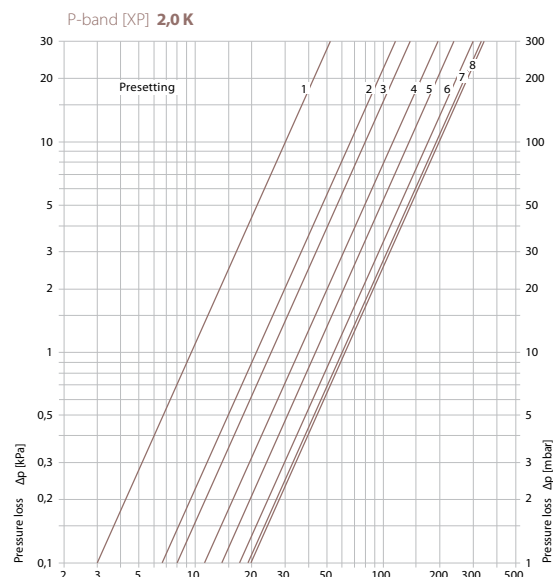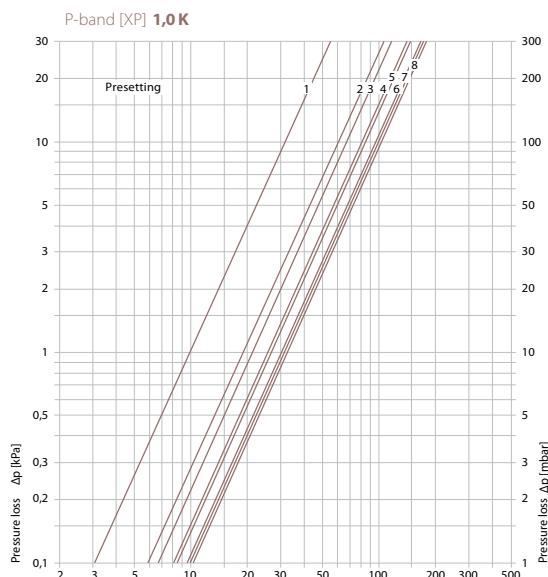

Lock function

The lock function can be used to lock the radiator without shutting down the heating system.


The valved design connection fitting closes the inlet and outlet by closing the closing screw and the thermostatic head.



Mounting dimensions

The supplied adapters enable the connection fitting to be fitted on the most commonly used connections: $\frac{3}{4}$ " external thread with flat sealing, $\frac{3}{4}$ " external thread Eurocone and $\frac{1}{2}$ " internal thread.

The mounting dimensions are also valid for the connection fittings without valve.



$\frac{3}{4}$ " external thread with flat sealing



$\frac{3}{4}$ " external thread Eurocone



$\frac{1}{2}$ " internal thread





Austria • Belarus • Belgium • Cyprus • Czech Republic • Estonia • France • Germany • Greece • Iceland • Ireland • Lithuania
Luxemburg • Norway • Poland • Portugal • Slovenia • Spain • Sweden • The Netherlands • Tunisia • Ukraine • United Kingdom

THE NETHERLANDS

Caradon Stelrad B.V. | Kathagen 30 | 6361 HG Nuth

WWW.STELRAD.EU

