



XILO

height 1744 mm, length 606 mm. Black finish (cod. 10).



Technical features:

- steel towel warmer radiator
- horizontal elements featuring rectangular tubes 50x10 mm diameter
- side manifolds with a 30 mm round section
- manifold threading 1/2" Gas right
- maximum working pressure 4 bar
- maximum working temperature 95°C

Prices include:

- 2 CHELA wall brackets
- 1/2" air vent

Finishes available Surcharge

Standard White
IRSAP finished
Other RAL colors

Finishing codes see page 604.

Special options and surcharges:


Surcharge for two 1/2" couplings welded to a lateral manifold and an internal flow diverter **(Cod. B10)**

CAUTION: a correct operation is possible only when the lower outlet coupling is in axial alignment with the lowest pipe. Whenever this coupling is higher, all the pipes below will remain cold because they are not involved in the flow of water.

Prearrangement for monotube valve **(Cod. B14, B15)**

❗ **For the possibility of requesting custom models see page 590**

Connections




On the sides

For other types of connections see pag. 422


Connection dimensions with IRSAP valves




cod. B10

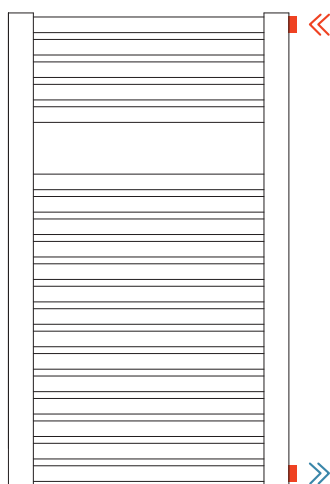


cod. B14

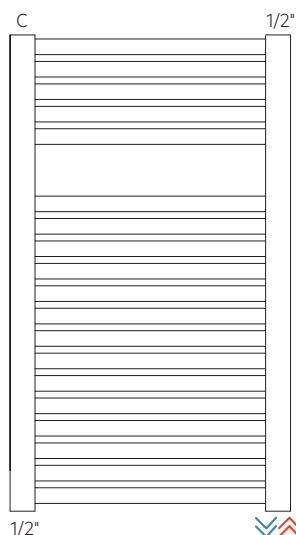

cod. B15

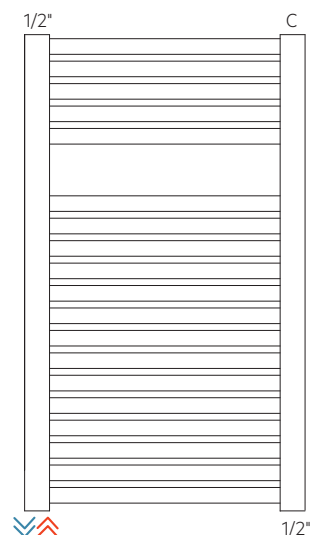

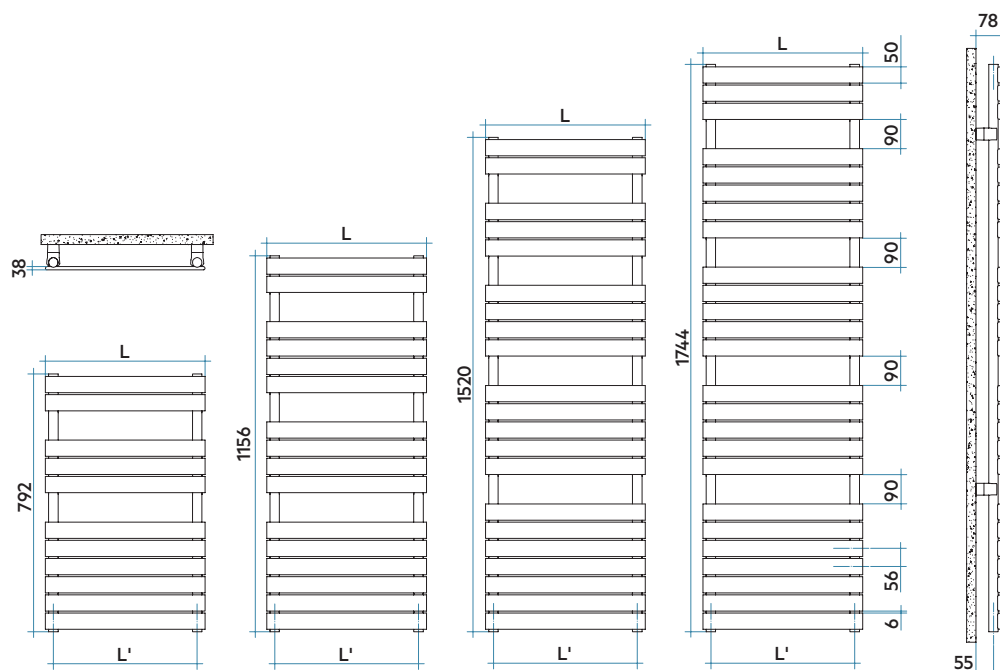

Model	Code	Depth mm	Height mm	Width mm	Conn. centre mm	Weight Kg	Cap. lt	Thermal Power					Exp. n.	Mix. Funct. Watt
								$\Delta t=50^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	$\Delta t=20^{\circ}\text{C}$			
792 11 rails 2 espaces	XOP045 B 01 IR 01 NNN	38	792	456	406	6,4	2,7	1286	377	288	204	126	1,200	400
	XOP050 B 01 IR 01 NNN	38	792	506	456	7,0	2,9	1406	412	315	223	137	1,199	400
	XOP055 B 01 IR 01 NNN	38	792	556	506	7,5	3,1	1526	447	342	243	149	1,198	400
	XOP060 B 01 IR 01 NNN	38	792	606	556	8,1	3,3	1646	482	369	262	161	1,197	400
	XOP075 B 01 IR 01 NNN	38	792	756	706	9,7	3,8	2006	588	450	319	197	1,195	400
1156 16 rails 3 espaces	XOM045 B 01 IR 01 NNN	38	1156	456	406	9,3	3,9	1731	507	390	278	172	1,180	400
	XOM050 B 01 IR 01 NNN	38	1156	506	456	10,1	4,2	1902	558	429	305	189	1,178	400
	XOM055 B 01 IR 01 NNN	38	1156	556	506	10,9	4,5	2073	608	467	333	207	1,177	400
	XOM060 B 01 IR 01 NNN	38	1156	606	556	11,7	4,8	2244	658	506	361	224	1,175	700
	XOM075 B 01 IR 01 NNN	38	1156	756	706	14,1	5,6	2756	808	622	444	276	1,170	700
1520 21 rails 4 espaces	XOL045 B 01 IR 01 NNN	38	1520	456	406	12,2	5,2	2230	654	498	351	215	1,214	700
	XOL050 B 01 IR 01 NNN	38	1520	506	456	13,3	5,5	2451	718	549	388	238	1,205	700
	XOL055 B 01 IR 01 NNN	38	1520	556	506	14,3	5,9	2672	783	600	425	262	1,195	700
	XOL060 B 01 IR 01 NNN	38	1520	606	556	15,4	6,3	2894	848	651	463	286	1,186	700
	XOL075 B 01 IR 01 NNN	38	1520	756	706	18,5	7,4	3558	1043	805	577	361	1,157	1000
1744 25 rails 4 espaces	XOG045 B 01 IR 01 NNN	38	1744	456	406	14,4	6,1	2612	766	588	418	258	1,185	700
	XOG050 B 01 IR 01 NNN	38	1744	506	456	15,7	6,5	2863	839	644	459	284	1,182	700
	XOG055 B 01 IR 01 NNN	38	1744	556	506	16,9	6,9	3113	912	701	500	310	1,179	700
	XOG060 B 01 IR 01 NNN	38	1744	606	556	18,2	7,4	3364	986	758	541	336	1,176	1000
	XOG075 B 01 IR 01 NNN	38	1744	756	706	21,9	8,7	4115	1206	930	665	414	1,167	1000

(*) Thanks to the high performance of Irsap XILO radiators, the ideal Δt for low temperature projects is Δt at 30°C .

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$


Key Codes

Width
Standard White colour code -
for different colour codes see the colors page


X O P 045 B 01 IR 01 NNN

Height Packing code Standard hydronic connection code


Decorative & Technical Accessories



Kit Valves and
Lockshield valve
Pag. 564



Pipe cover kit
Pag. 568



Electronic Control
Pag. 584

